

»» 农机带

Agricultural Machinery Belt

农机带型号与尺寸 Type & Size of Agricultural Machinery Belt


随着联合收割机、插秧机等农机变得高性能化和更加紧凑，皮带反向挠曲严重，发热量大且突发荷载的冲击增大等现象越来越多，原有的皮带显然无法满足与之相应的质量要求。

凯欧的农机带进行了技术革新，采用切边V带生产工艺，主体材料采用耐挠曲性、耐热性、耐油性极佳的复合材料，骨架材料采用特殊的聚酯硬线生产而成，完全满足了农机的特殊使用要求。

With the increasing demand on advanced performance and more compactness of agricultural machinery including combined harvester, transplanter, etc., serious reverse flexure of belts, large calorific power, and increasing impact of outburst load, the original belts obviously can't satisfy corresponding quality requirements. Technical innovation is made on our agricultural machinery belt. The production technique of raw edge V belts is adopted in agricultural belt. The principal material is made of best compound material with flexing resistance, heat resistance, and oil resistance. The material of the framework is manufactured by special polyester stiff cord, completely meeting the special requirements of agricultural machinery.


农机变速(半宽)V带尺寸 Dimension of Agricultural Machinery Variable Speed (Half Width)V Belt

型号 type	HG	HH	HI	HJ	HK	HL	HM	HN	HO
顶宽 b	16.5	20.4	25.4	31.8	38.1	44.5	50.8	57.2	63.5
节宽 bp	15.4	19.0	23.6	29.6	35.5	41.4	47.3	53.2	59.1
带高 h	8.0	10.0	12.7	15.1	17.5	19.8	22.2	23.9	25.4

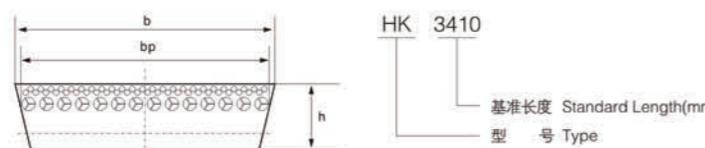

农机变速V带尺寸 Dimension of Agricultural Machinery Variable Speed V Belt

型号Type	25FV	32FV	38FV	44FV	51FV	57FV	63FV
顶宽 b	25.0	32.0	38.0	44.0	51.0	57.0	63.0
带高 h	13.0	15.0	18.0	20.0	22.0	24.0	26.0

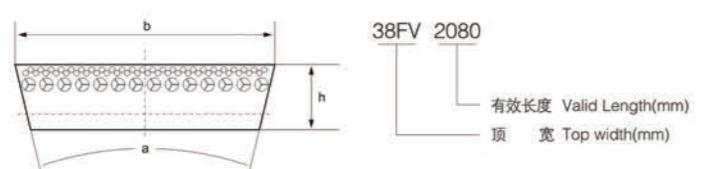

»» 变速带

Variable Speed Belts




产品特点 Product Features

无极变速带具有结构简单，传动平稳，能吸收振动，维修方便，可以实现无极变速。

Stepless variable speed belt features simple structure, stable transmission, vibration absorb and convenient maintenance, realizable stepless variable speed.

工业用变速度V带尺寸表 Dimensions of Industrial Variable Speed Belt

型号 type	W16	W20	W25	W3.15	W40	W50	W63	W80	W100
顶宽 b	17	21	26	33	42	52	65	83	104
节宽 bp	16	20	25	31.5	40	50	63	80	100
带高 h	6	7	8	10	13	16	20	26	32

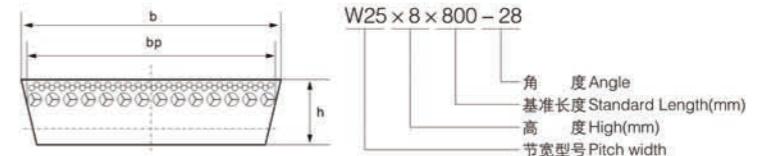

型号 type	1022V	1422V	1922V	2322V	2926V	4430V	4836V	6236V
顶宽 b	16	22	30	36.5	46	70	76	100
带高 h	6	8	11	12	14	17	22	26
角度 a	22°	22°	22°	22°	26°	30°	36°	36°

