



>>> 联组V型带 Banded V-Belts

>>> 输送带 Conveyor Belt

产品特点 Product Features

产品特点 Product Features




联组V型带 Banded V-Belt

联组V型带是由具有高模量线绳和特殊配方的氯丁胶化合物组成，一次成型硫化，具有良好的整体性。各条带受力均匀，运行平稳，承载传力高，使用寿命长不易抖动和翻带，适用于脉动负荷和有冲击振动的场合，特别适用于高直地面的平行轴传动。

Banded V-belt is made up of strong high modulus threads and special chloroprene rubber compound. It is vulcanized to shape one time in good quality. And it has the equal bear force, move placidity. The weight bearing force is high, and it last long. It seldom twist or overturn. It is fit for occasion which is transmission burthen and concussion librate.


需要在一个带轮套上几条V型带时，按照所需数目进行连接而成的胶带，防止因带长不一造成寿命降低。

The belt is connected according to required number when a few V belts are required for one belt pulley to prevent the reduction of the service life due to non-uniform belt length.

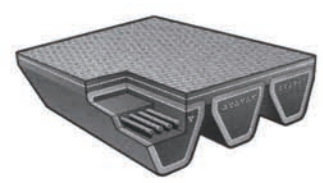


普通V型带 Classical V-belts

分类Category	型号Type	P(mm)
普通V型带 Classical V-belts	A	15.0
	B	19.0
	C	25.5
	D	37.0

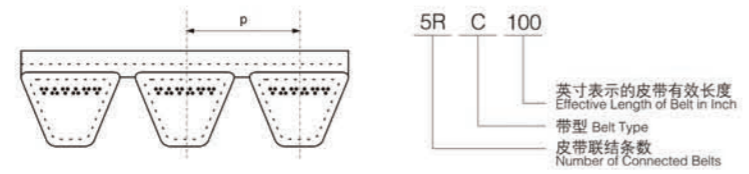

窄幅V型带 Narrow V-belts

分类Category	型号Type	P(mm)
窄幅V型带 Narrow V-belts	3V/5PZ	10.3
	5V/SPB	17.5
	8V	28.6

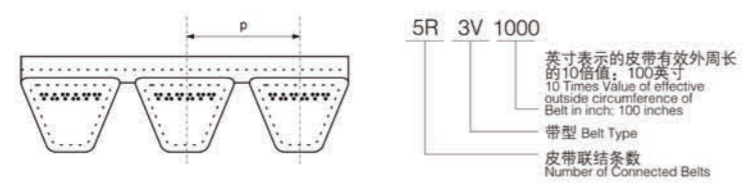

品种 Type	芯体材料 Material of belt core	宽度 (mm) Width	总厚度 (mm) Total thickness	适用范围 Suitable scope
尼龙输送带 Nylon Fabric Conveyor Belt	NN100 NN150 NN200 NN250 NN300	300-1600 12" -63"	7-8	适用于中长距离和冲击性较大，磨损较重的条件下输送物料。 Suitable for middle-long distance conveyance under the rather high abrasion.
聚氨酯输送带 Ep Conveyor Belt	EP100 EP150 EP200 EP250	300-1600 12" -63"	7-8	适用于中长距离，重载荷，磨损较重，且环境温度较高的条件下输送物料。 Suitable for middle-long distance conveyance under the high abrasion and rather high temperature as well.
普通输送带 Convnetional Conveyor Belts	棉帆布或 纤维帆布 Cotton canvas or vc canvas	300-1600 12" -63"	7-8	适用于一般条件下输送块状、粒状、粉状的物料和成件物品。 For transports of materials in lump, grain, and Powder as well as articles in general conditions.
耐热输送带 Heat Resistant Conveyor Belts	聚氨酯或 棉帆布 EP or Cotton canvas	300-1600 12" -63"	7-8	适用于烧结厂，焦化厂，水泥厂和化工厂的各种高温粉状块状物料的输送。 Suitable for conveyance of powder or piece Articles in high temperature and used as oilproof, Acidproof and alkaliproof conveyor belts. 生产规格 Specification 胶带表面温度 Belts Temperature II<125°C III<150°C
耐油输送带 Oil Resistant Conveyor Belts	棉帆布或 化织织物 Cotton canvas or synthetic fabric	300-1600 12" -63"	7-8	适用于一般附有机油油的零件，其它含油物质的输送。 Sitable for conveyance of parts with chemical Oil and other oily articles
耐酸碱输送带 Chemical Resistant Belts	棉帆布或 化织织物 Cotton canvas or synthetic fabric	300-1600 12" -63"	7-8	适用于附有化学品的物品，化学药品，纸浆和化肥等物料的输送。 Suitable for the conveyance of articles with Chemicals, paper pulp and fertilizer.
环形输送带 Endiess Conveyor Belts	棉帆布或 化织织物 Cotton canvas or synthetic fabric	300-1600 12" -63"	7-8	专用输送机械设备，产品无接头，环形周长3200-4000MM。 For special transport equipments,the products are endless,the endless length is 3200-4000mm.